


Wall hood
Vision 120cm7840/1
Black glass

EAN	5414425078400
Energy label	
Energy efficiency class (EElhood)	A+
Annual energy consumption (kWh/year) (AEChood)	45,5
Fluid Dynamic Efficiency class (FDEhood)	A
Lighting efficiency class (LEhood)	A
Grease filtering efficiency class (GFEhood)	B
General information	
Motor integrated	•
Kind of light	LED (2x2W, 2.700K)
Dimmable light	-
With sound absorber	•
Recirculation	-
Dimensions (mm)	
Dimensions (WxD)	1198 x 426
	517 (outlet back); 830
	- 1100 (outlet top)
Height cookerhood (Hmin - Hmax)(mm)	
Maximum height with extended chimney (mm)(optional)	1390
Advice mounting height with electrical, induction and ceramic hobs (Hmin-Hmax)(mm)	500 - 750
Advice mounting height with gas hobs (Hmin-Hmax)(mm)	650 - 750
Diameter outlet (mm)	150
Functions	
Operation	touch screen
Number of speed	3 + power
Powerspeed automatically to lower speed (minutes)	6
Delayed self switching off (minutes)	10
InTouch function for induction hob	optional
Auto-Stop	•
Light indicator for grease filter cleaning	•
Airflow and noise level	
Airflow (m3/h)(according to EN 61591)	
- Speed 1	244
- Speed 2	341
- Speed 3	467
- Powerspeed / speed 4	808
Pressure (Pa) on the highest speed (according to EN 61591)	585
Noise Level (dB(A) re 1 pW/ dB(A) re 20µPa) (according to EN 60704-2-13)	
- Speed 1	35 / 25
- Speed 2	42 / 32
- Speed 3	52 / 41
- Powerspeed / speed 4	62 / 51
Technical specifications	
Number of grease filters	2
Total power (W)	325
The power consumption in off-mode in Watt (P0)	-
The power consumption in stand-by-mode in Watt (Ps)	0,37
Position exhaust	top/back
Weight cookerhood / motorunit (kg)	32,5
Accessories	
Extended chimney	7830100
Kit for remote control (InTouch)	990021
Kit 2 x LED colour (neutral white) 4000 K	906303




Wall hood
Vision 120cm

7840/1
Black glass

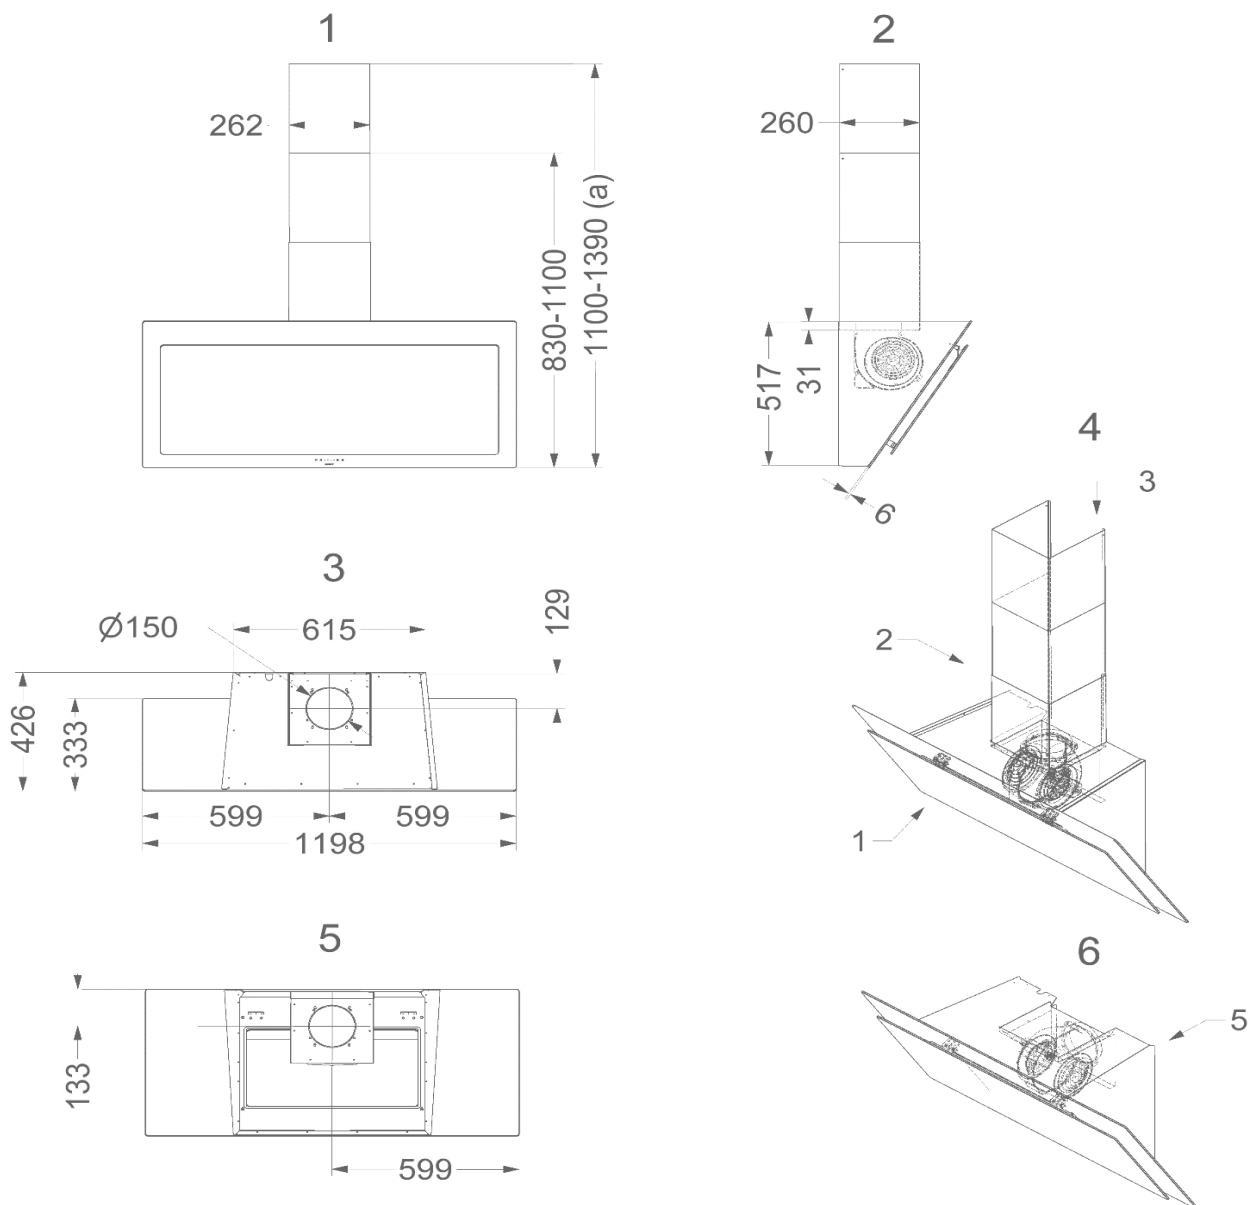

Wall hood
Vision 120cm

7840/1
Black glass

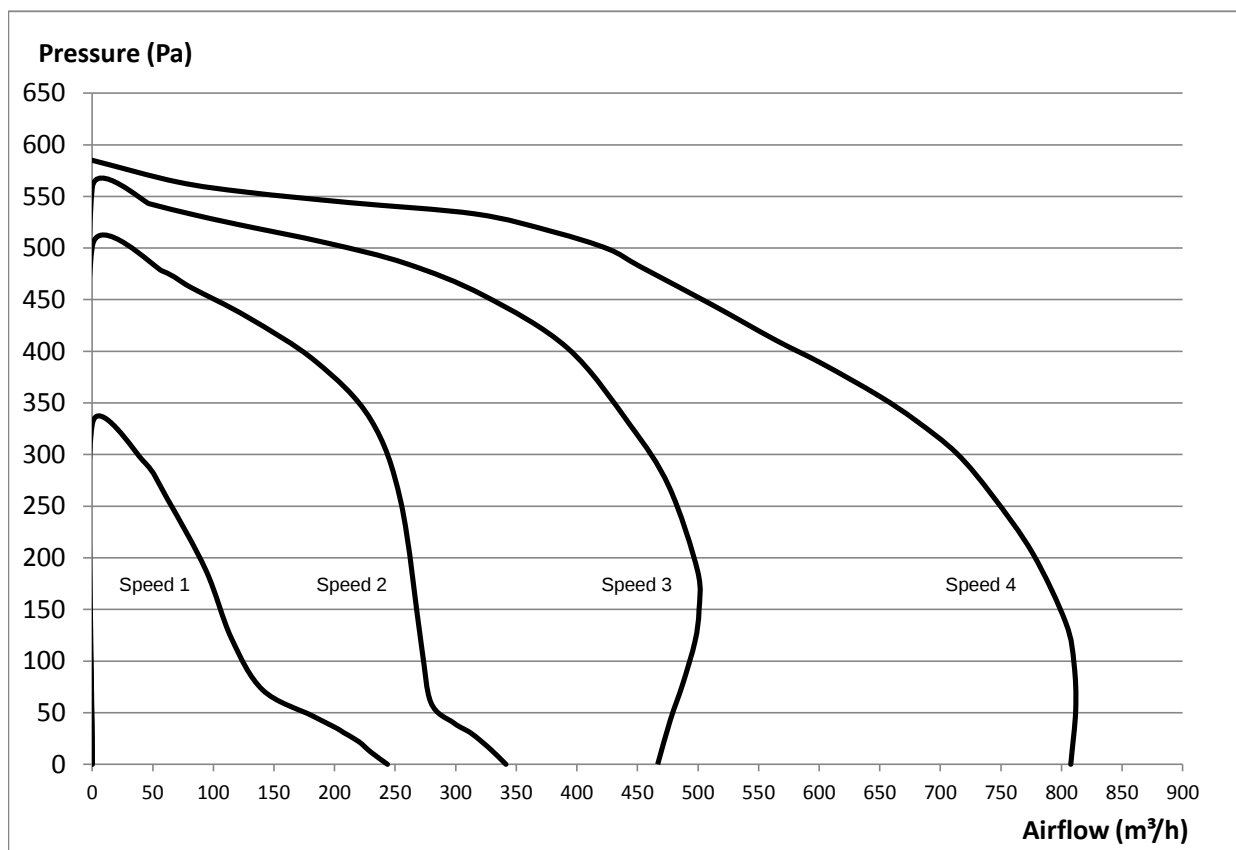

Wall hood
Vision 120cm

7840/1
Black glass

