

Built-in unit
Mini Pure'line 90cm

820/15
Stainless steel

EAN	5414425008209
Energy label	
Energy efficiency class (EEIhood)	A+
Annual energy consumption (kWh/year) (AEChood)	29,1
Fluid Dynamic Efficiency class (FDEhood)	A
Lighting efficiency class (LEhood)	A
Grease filtering efficiency class (GFEhood)	D
General information	
Motor integrated	•
Possibility to separete the motor (indoor installation)	optional
Kind of light	led (4x2W)
Dimmable light	•
With sound absorber	•
Recirculation	optional (Monoblock)
Dimensions (mm)	
Dimensions (WxDxH) (mm)	860 x 301 x 330
Dimensions cut-out opening (WxD)(mm)	845 x 286
Width flange (mm)	10
Advice mounting height between worktop to cooker hood with electrical and ceramic hobs (Hmin-Hmax)(mm)	600 - 850
Advice mounting height between worktop to cooker hood with gas and induction hobs (Hmin-Hmax)(mm)	650 - 850
Diameter outlet (mm)	150
Functions	
Operation	touch buttons + remote control
Number of speed	3 + power
Powerspeed automatically to lower speed (minutes)	6
Delayed self switching off (minutes)	10
InTouch function for induction hob	•
Auto-Stop	•
Light indicator for grease filter cleaning	•
Light indicator for recirculation filter cleaning/ substitution	•
Airflow and noise level	
Maximum flow (m3/h)	815
Airflow (m3/h)(according to EN 61591)	
- Speed 1	253
- Speed 2	425
- Speed 3	563
- Powerspeed / speed 4	655
Pressure (Pa) on the highest speed (according to EN 61591)	364
Noise Level (dB(A) re 1 pW/ dB(A) re 20µPa) (according to EN 60704-2-13)	
- Speed 1	36/27
- Speed 2	49//38
- Speed 3	57/46
- Powerspeed / speed 4	60/49
Technical specifications	
Number of grease filters	1
- Total power (W)	118
The power consumption in off-mode in Watt (P0)	-
The power consumption in stand-by-mode in Watt (Ps)	0,31
Position exhaust	top/ right/ left/ front/ back
Weight cookerhood / motorunit (kg)	28/6



Built-in unit
Mini Pure'line 90cm

820/15
Stainless steel

Accessories

Recirculation kit

- Built-in recirculationbox with Monoblock filter (stainless steel)(270x500x295mm)
- Built-in recirculationbox with Monoblock filter (white)(270x500x295mm)

830400

831400



- Built-in recirculationbox with Monoblock filter (stainless steel)(140x820x298mm)

7900400



- Recirculation kit (without Built-in recirculationbox)

820400



Kit for mounting the motor on a distance

800998



Extended cable for seperated motor (5m)

7000094




Kit for valve or external lighting control

990030



Built-in unit
Mini Pure'line 90cm

820/15
Stainless steel

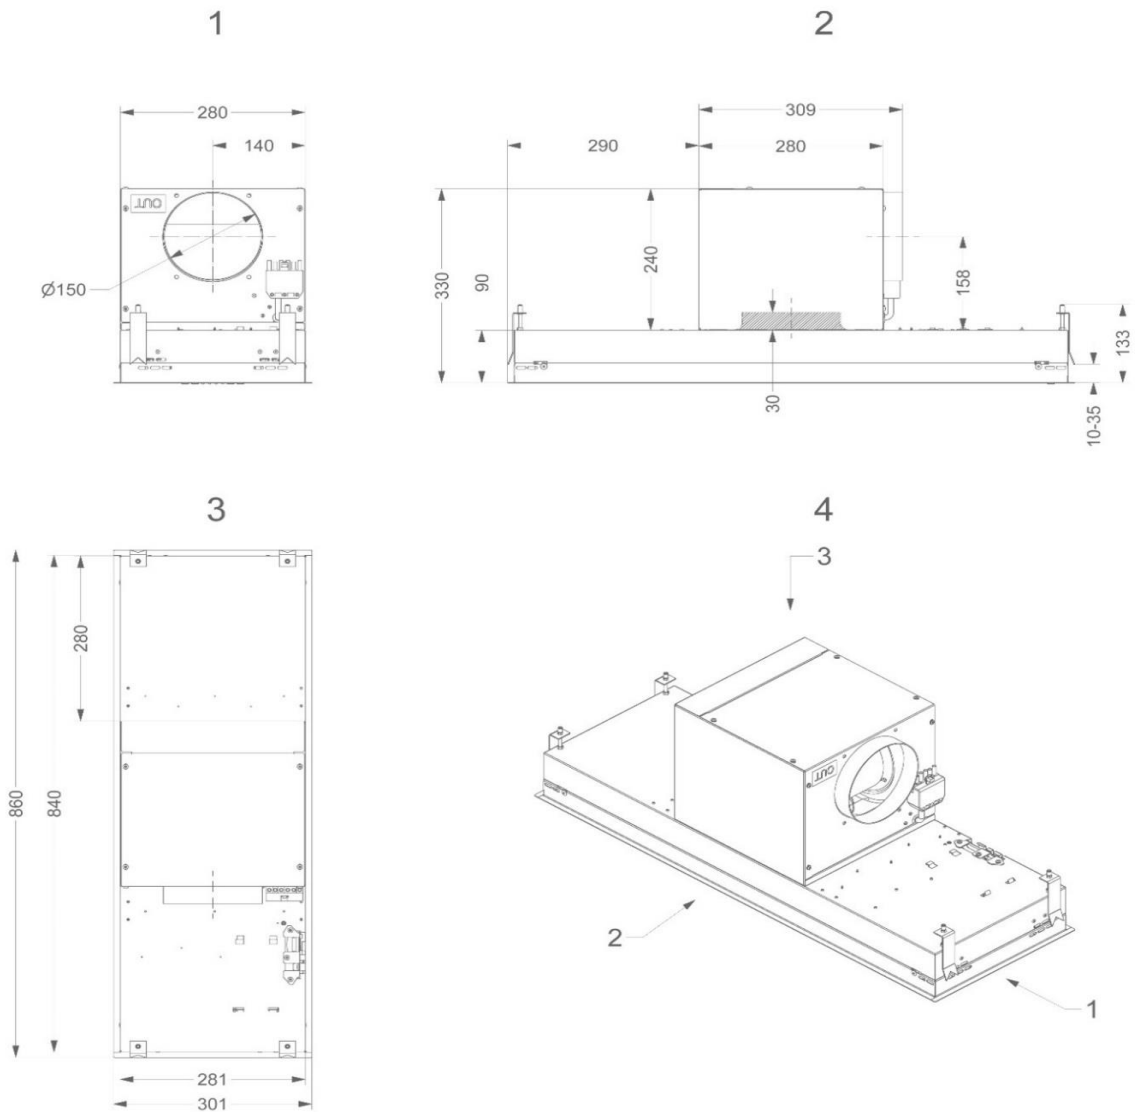

Built-in unit
Mini Pure'line 90cm

820/15
Stainless steel

